


PP Band Tape Cutter

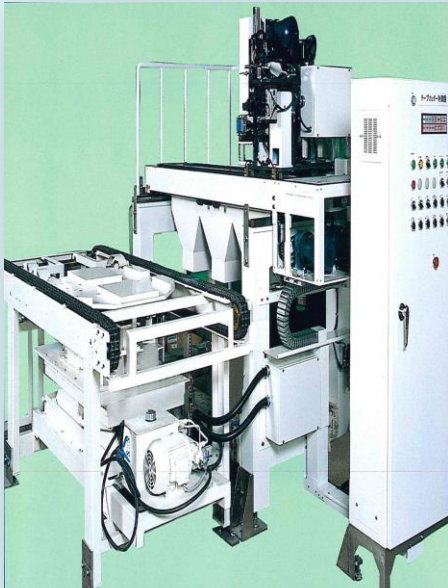

Outline:

When cardboards, cans, pet bottles or glass bottles are carried to the food manufacturers, they are needed to be tied by PP band to protect from collapsing in the carrying lorry. By utilizing the PP band cutter into the filling line, it becomes smooth to carry out the cutting and cleaning processes of the PP band through automation and mechanization by optimizing the operational shock and unnecessary movements.

- ◆ It operates by automatic positioning and reduces the cutting waste up to 2-3 cm so that it becomes easy to clean during post processing.
- ◆ It handles products without making any damage or scratch.
- ◆ Tape processing time is fast, max 25m/min.
- ◆ Compact design suits for labor saving and automation.

Specifications:

Band Outline	PP Band, PE, PET Band
Processing Capacity	1 pallet (3 Pieces) / 3 Min ; 20 pallets/ H
Body Size	2350 (mm) L×750 (mm) B×1800 (mm) H
Power Ability	With automatic tape detection . Body height adjustment device inclusion.
Power Consumption	200V 3φ 1.3kW
Air consumption	5 kg/cm ² ×150ℓ/min
Other specifications	It can load 2-3 units at high speed. Options for cutting two types of tie is available: parallel (//) and box (田).

Sales Agents:



Aiming for Harmony between People and Work

Daishin Co., Ltd

2635 Isagai, Higashiyoka-cho, Saga city, Saga, 840-2223, Japan.

TEL +81952-45-5131 / FAX +81952-45-5132

E-mail saga@daishin-sa.co.jp

URL <https://daishin-sa.co.jp>

